

DECO

DRIVE CV4

MEGA^{LITE}

PRODUCT SPECIFICATION SHEET

DESCRIPTION

Using our innovative approach to simplify the need for multiple drivers, the DECO DRIVE CV4 was designed to control our popular DECO Series. This all-in-one solution features 4 outputs that gives users the ability to control multiple products at once.

Each output can be individually configured and addressed in any preferred channel. This powerful driver has a max power of 384W with 96W per output. The removable rack ears allow the unit to be wall, rack and rear rack mounted making it easy for various installations. Simplify your next project with the DECO DRIVE CV4!



ALL IN ONE SYSTEM

This power supply and driver all in one features four outputs that have independent control. Each output can be individually configured and addressed to any preferred channel.



POWERFUL

The driver has a max power of 384W and can hold up to 96W per output. Connect up to five DECO Recessed or Pendants per output, six DECO Cove Q18 per output or one DECO Flex per output (more DECO Driver compatible products available).



FLEXIBLE MOUNTING

The removable rack ears allow the unit to be wall-mounted, rack-mounted or rear-mounted, simplifying the installation process.

PHYSICAL

- DISPLAY:
- HOUSING:
- INSTALLATION SYSTEM:

ELECTRICAL & CONNECTIONS

- TOTAL MAX POWER: 384W
- POWER INPUT: 110-240VAC 5.9A 50/60 HZ
- POWER CONNECTION: POWER CON-TYPE CABLE MOUNTED TO NEMA 5-15 HEAD
- DRIVE METHOD: CONSTANT VOLTAGE
- DMX CONNECTION: 5 PIN XLR & RJ45 IN AND OUT (OPTIONAL 3 PIN AVAILABLE)
- OUTPUT CONNECTION: 4 PORT 5 PIN SCREW TERMINAL & RJ45 OUTPUT
- OUTPUT CAPABILITIES: 4 OUTPUTS THAT CAN BE INDIVIDUALLY CONTROLLED
- OUTPUT: 24V
- POWER PER OUTPUT: 96W
- BALLAST: ELECTRONIC MEAN-WELL RSP-500-24

THERMAL & RATINGS

- WORKING AMBIENT TEMP: 24° F - 148° F
- COOLING: SILENT, CONVECTION COOLED
- REFRESH: 4,000 HZ

CONTROL & PROGRAMMING

- OPERATING MODE: 22 PRE-PROGRAMS, STAND ALONE VIA DISPLAY
- PROTOCOL: DMX 512
- DMX 5 MODES: 5 MODES OF OPERATION
- SENSOR BYPASS: 12V (TO ENGAGE FULL ON)

ORDERING INFO

- DECO DRIVER CV4

INCLUDED ITEMS

- POWER CON TYPE CABLE
- 4 5-PIN SCREW TERMINAL BLOCKS
- 2-PIN SCREW TERMINAL BLOCK
- REAR & WALL SUPPORT RACK EARS

DIGITAL
BLACK PAINTED
REMOVABLE RACK EARS

384W
110-240VAC 5.9A 50/60 HZ
POWER CON-TYPE CABLE MOUNTED TO NEMA 5-15 HEAD
CONSTANT VOLTAGE
5 PIN XLR & RJ45 IN AND OUT (OPTIONAL 3 PIN AVAILABLE)
4 PORT 5 PIN SCREW TERMINAL & RJ45 OUTPUT
4 OUTPUTS THAT CAN BE INDIVIDUALLY CONTROLLED
24V
96W
ELECTRONIC MEAN-WELL RSP-500-24


24° F - 148° F
SILENT, CONVECTION COOLED
4,000 HZ

22 PRE-PROGRAMS, STAND ALONE VIA DISPLAY
DMX 512
5 MODES OF OPERATION
12V (TO ENGAGE FULL ON)

Part Number:
5065


DIMENSIONS:

- FIXTURE SIZE: 19" X 10.37" X 1.75"
- FIXTURE WEIGHT: 8.4 lb
- PACKAGED SIZE: 21" X 12" X 3.75"
- PACKAGED WEIGHT: 9.5 lb

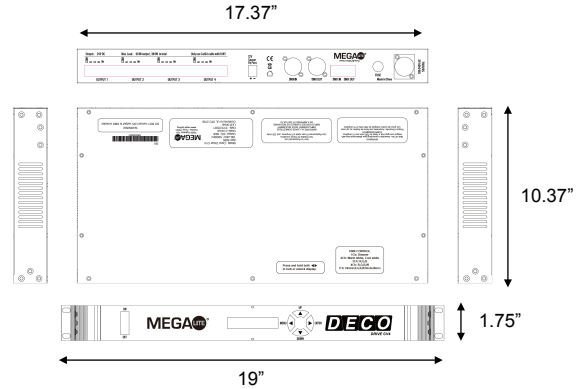


CONNECTIONS:


DECO SCNCE
CONNECT ONE UNIT, POWER LINK UP TO 5 UNITS.
(1 OUTPUT X 5 FIXTURES UP TO 15 TOTAL)

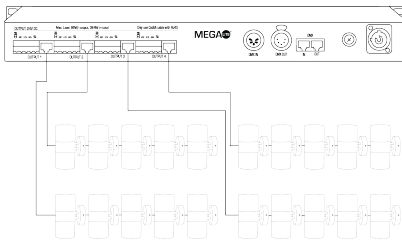


DECO PENDANT
CONNECT ONE UNIT, POWER LINK UP TO 5 UNITS.
(1 OUTPUT X 5 FIXTURES UP TO 15 TOTAL)

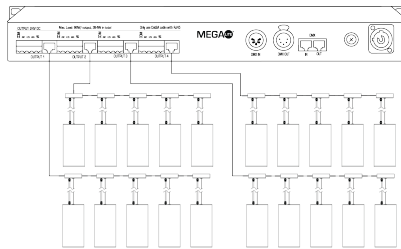


DECO RECESSED
CONNECT ONE UNIT, POWER LINK UP TO 5 UNITS.
(1 OUTPUT X 5 FIXTURES UP TO 15 TOTAL)

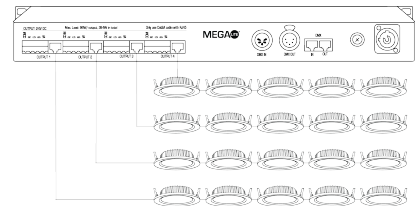


DECO COVE Q18
CONNECT ONE UNIT, POWER LINK UP TO 5 USING JUMPER CABLE
(1 OUTPUT X 5 FIXTURES UP TO 15 TOTAL)

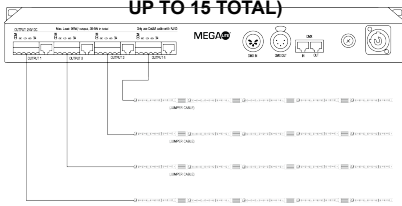


DECO CITYSCAPE
CONNECT ONE UNIT
(1 OUTPUT X 3 FIXTURE UP TO 9 TOTAL)

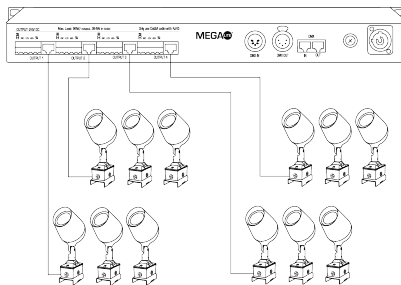


DECO INDY PENDANT
CONNECT ONE UNIT
(1 OUTPUT X 1 FIXTURE UP TO 4 TOTAL)

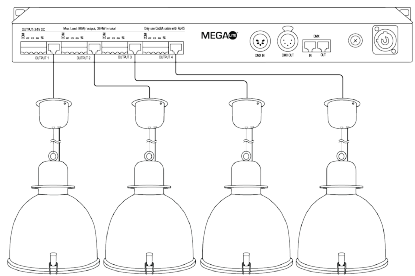

DECO FLEX SERIES
CONNECT ONE UNIT
(1 OUTPUT X 1 FIXTURE UP TO 4 TOTAL)

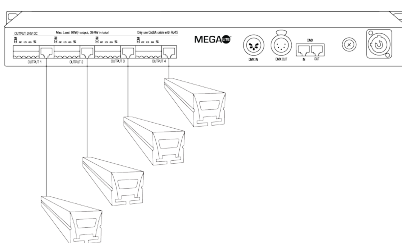

DECO PARLED Q10
CONNECT ONE UNIT, POWER LINK UP TO 9 USING JUMPER CABLE
(1 OUTPUT X 9 FIXTURE UP TO 27 TOTAL)

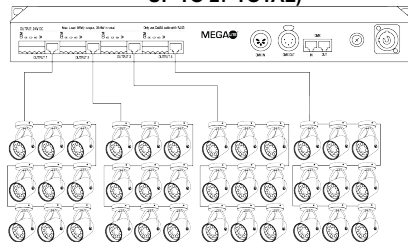

DECO POP Q10
CONNECT ONE UNIT, POWER LINK UP TO 9 USING JUMPER CABLE
(1 OUTPUT X 9 FIXTURE UP TO 27 TOTAL)

