




DESCRIPTION



The color changing IP64 DECO Parled Q10 offers a bold and elegant approach to interior and exterior applications. Designed with 7 Red, Green, Blue and Warm White LEDs, this unit provides bright radiant colors for ambient and directional lighting. With a 3267K warm white color temp, this compact unit can be used to highlight specific items or areas with rich, saturated colors or soft warm whites.

The use of the Voltage over Ethernet method enables this fixture to be easily installed without the need for conduit. As part of the DECO Series, the Parled Q10 was designed to provide versatility with simplicity by being able to connect to a number of different DECO Drivers for power and control connection. Simplify your next install with the DECO Parled Q10!







With an IP64 rating, this unit was designed to be suitable for interior or exterior installations.



The DECO PARLED Q10 was designed with simplicity and versatility in mind; connect to DECO Drivers for power and control connection.

SOURCE

LED TYPE:

SMD 5050 R,G,B, WW · LED QTY: 7 RGBWW LEDs

· EACH LED WATT: 1.4W

EFFECTS

TETRA COLOR: RED, GREEN, BLUE, WARM WHITE

IP64

9.8

24V DC

6 INCH

ALUMINUM

RJ45 IN AND OUT

CONSTANT VOLTAGE

 COLOR TEMP ON WW: 3267K CRI: (WARM WHITE) 84.3

OPTICAL SYSTEM

· FIXTURE LENS ANGLE: 27° (W/O DIFFUSER)

CONTROL & PROGRAMMING DECO Drive CV1

• DECO Drive CV3 DIN: • DECO Drive CV4: · CONTROL:

· DMX CHANNELS:

IP RATING

THERMAL & RATINGS

ELECTRICAL & CONNECTIONS

TOTAL MAX POWER: POWER INPUT:

• POWER CONNECTION: · DRIVE METHOD:

PHYSICAL HOUSING MATERIAL:

· CABLE LENGTH: RIGGING

INSTALLATION SYSTEM: **ELECTRICAL BOX MOUNT**

ODERING INFO: Part Number:

DECO PARLED Q10 5054


DIMENSIONS:

· FIXTURE SIZE: 4.72" X 4.72" X 9.75"

· FIXTURE WEIGHT: 2.2lb

· PACKAGED SIZE: 5.5" X 5.5"X 11.5"

• PACKAGED WEIGHT: 2.5lb

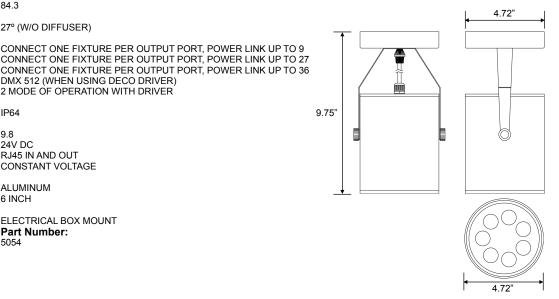

^{*}Specifications Subjet To Change


CONNECTION EXAMPLES: TO SEE EVERY DECO FIXTURE COMPATIBILITY PLEASE SEE FIXTURE'S MANUAL

DMX 512 (WHEN USING DECO DRIVER)

2 MODE OF OPERATION WITH DRIVER


DECO DRIVE CV1

(One unit per output port, up to 9 when power linked. Total of 1 output x 9 fixtures.)




DECO DRIVE CV4

(One unit per output port, up to 9 when power linked. Total of 4 outputs x 36 fixtures.)



DECO DRIVE CV3 DIN

(One unit per output port, up to 9 when power linked. Total of 3 outputs x 27 fixtures.)



DECO DRIVE CV24

(One unit per output port, up to 9 when power linked. Total of 24 outputs x 48 fixtures.)

