





Product Description:

The PileLite Multibeam is a versatile lighting fixture featuring 7 x 60W RGB + Cool White LED 4.5° pixel beams with individual control. It offers a rich color spectrum, clear white, and several mounting positions (horizontal, vertical, diagonal) that allow for creative designs. The modular grouping options (2, 3, or 4 units) allows for creative setups such as circles, semicircles, or standalone arrangements, making it ideal for corners or tight spaces. The PieLite Multibeam's powerful, controllable beams can be used in various settings, enhancing any space with stunning visual effects.

7 Mounting positions

The PieLite Multibeam offers 7 different mounting positions, including horizontal, vertical, or diagonal, providing flexibility for various setup options.

Modular grouping - 2, 3, 4 units

Unleash your creativity by grouping 4 units to form a circle or 2 units to create a semicircle. Position it in corners, walls, ceilings, or tight spaces to dazzle the room with powerful beams.

7 60W RGB + Cool White 4.5° pixel beam

Achieve stunning white effects alongside a rich color spectrum, thanks to individual 4.5° pixel control for precise lighting customization.


Mechanical Specifications


Display:

| Housing: | Metal |
|---------------------------|--------------------------------------|
| Power Connection: | Seetronics SAC3MPX Input & SACFPX |
| | output (Nema 5-15 to SAC3FX-67 |
| | cable included) |
| Signal Connection: | 3 and 5 Pin XLR In and Out |
| LED Angle: | 4.5° |
| Segments: | 7 segments |
| Fastening System: | Quick Release Clamp Mounts, Multiple |
| | Fixture Quick Release Joining Mounts |
| Electrical Specifications | |
| Light Source: | 7 X 60W RGBW |
| Color Temperature: | 7227K (white Emitter Only) |
| CRI (Warm White): | 73 |
| Lumen Output: | 792 |
| Power Supply: | Electronic 90-264V AC 50/60 |
| Power Consumption: | 537 Watts / 4.69 Amps @110V |
| Control System | |
| Control Protocols: | DMX 512, RDM |
| RDM: | Fixture Label |
| | DMX Start Channel Address |
| | Channel Mode Set |
| Channel Modes: | 4 Modes of Operation |
| | Mode 1: 4 Channel mode |
| | Mode 2: 10 Channel mode |
| | Mode 3: 28 Channel mode |
| | |

LCD

Size and Weight

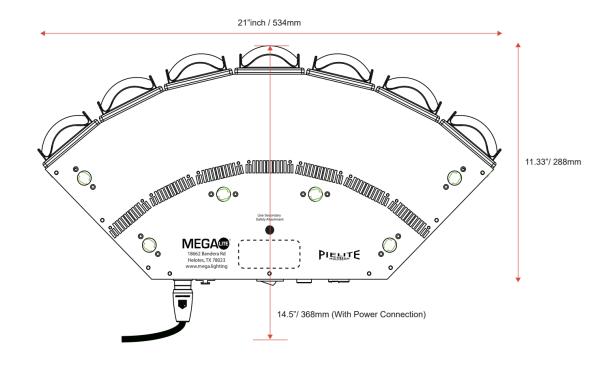

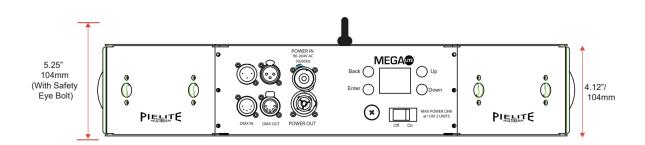

Fixture Size: 21" X 11.33" X 5.25"

(53.34 cm x 28.77 cm x 13.335 cm)

Fixture Weight: 15 lb 14oz (6.8 kg)

Packaged Size: 25" X 13.75" X 8"

(63.5 cm x 34.92 cm x 20.32 cm)

Packaged Weight: 18lb (8.16kg)

Included Items

Pielite fixture 4150

Quick release clamp mount 4150-HOU-QUI-2 Quick release joining mount 4150-HOU-QUI-4

User manual Power cable

Customer Service

MEGA-Lite has a customer support line to provide set-up help and answer any questions should you encounter a problem. Please visit our website for any other related technical documents. For service-related issues, please contact our service department at **service@mega.lighting**

Operating Hours: Monday - Friday 9AM - 6PM CST

Phone: (210) 684-2600

Email: Sales@mega.lighting



18662 Bandera Rd Helotes, TX 78023 Phone (210)684-2600 / Fax (210)855-6279 www.mega.lighting / info@mega.lighting